



Specification sheet

Kenway

The LED Kenway strip light offers a cost-effective LED alternative luminaire to fluorescent fittings. The fitting is available as Standard or with Microwave Sensor, Nightlight and/or integrated Emergency Pack.

Options

- Dimmable
- Emergency
- Microwave sensor
- Nightlight

Applications

- Car Parks
- Corridors
- Gas Stations
- Storage Warehouses

Details


- IP 20
- Material : Aluminium + Steel + Polycarbonate
- Energy Rating C
- 10 Year warranty
- LED lifespan L80/B10>63000

Specification

SKU	Wattage	Lm/W	CCT k	Power Factor	Dimensions mm	Weight kg	Input Voltage	Input Frequency	Colour
KEN-10	10	160	4000	>0.9	600 x 84.5 x 79.5	1	AC 220-240 V	50-60 Hz	White
KEN-14	14	160	4000	>0.9	1200 x 84.5 x 79.5	2.05	AC 220-240 V	50-60 Hz	White
KEN-23	23	160	4000	>0.9	1500 x 84.5 x 79.5	2.47	AC 220-240 V	50-60 Hz	White
KEN-31	31	160	4000	>0.9	1800 x 84.5 x 79.5	2.92	AC 220-240 V	50-60 Hz	White

Photometric graph

C Plane Distribution Diagram

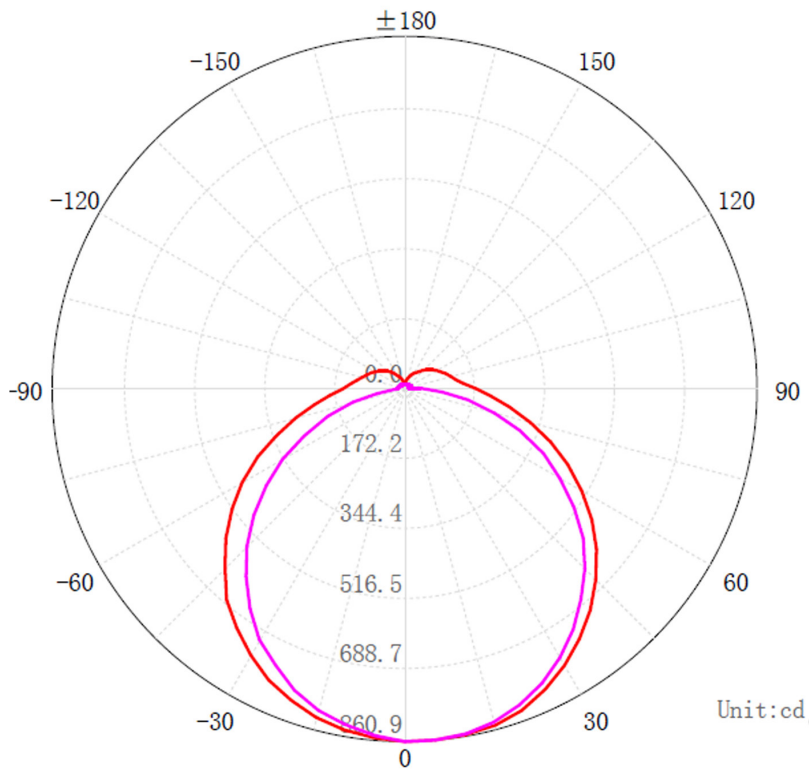

C Plane	[50%MaxAng.]	[10%MaxAng.]
— C0.0_180.0 :	127.8	239.3
— C90.0_270.0 :	114.1	164.3

