



Specification sheet

Luci

The Luci LED linear luminaire is available in 4 standard lengths and available in both up and down directional lighting. Great for offices and retail spaces, can be continuous with additional bracket and joint accessories to make desired shapes. Modern minimalist interior design can be surface/wall mounted or suspended. Linkable for continuous runs. Luminous ratio of the up&down LED linear light is 30% upward and 70% downward.

Options

- Dimmable
- Emergency
- CCT Selectable
- Wattage Selectable
- Sensor

Applications

- Hotels/Leisure
- Offices
- Retail
- Shopping Centres
- Waiting Rooms


Details

- Material : Aluminium + Polycarbonate
- Energy Rating D
- LED lifespan L80/B10>63000
- SDCM <5
- IK04
- CRI (Ra) 80+
- 10 year warranty

Specification



SKU	Wattage	Up to Lm/W	CCT k	Power Factor	Dimensions	Input Voltage	Input Frequency	Colour
LUC-12	12-16-20	140	3000-4000-5000	>0.9	600 x 60 x 75	AC 220-240 V	50-60 Hz	Silver
LUC-24	24-32-40	140	3000-4000-5000	>0.9	1200 x 60 x 75	AC 220-240 V	50-60 Hz	Silver
LUC-30	30-40-50	140	3000-4000-5000	>0.9	1500 x 60 x 75	AC 220-240 V	50-60 Hz	Silver
LUC-36	36-48-60	140	3000-4000-5000	>0.9	1800 x 60 x 75	AC 220-240 V	50-60 Hz	Silver

Accessories

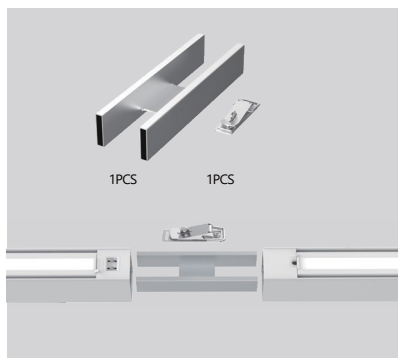



I-type

Size: L200*W57*H36mm
 Color Finish : Aluminum
 Gross/Net weight : 0.14/0.13KG

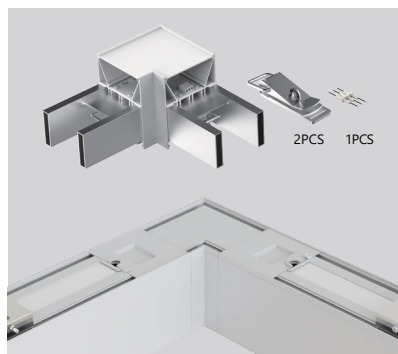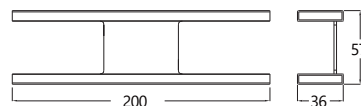



L-type

size : L75*W75*H75mm
 Output Voltage : 36V power : 12S1P
 Max : 0.085A, Max : 3.4W
 CCT : 12S1P*2, Max : 0.085A, Max : 3.4W
 LED : 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 0.42/0.29KG

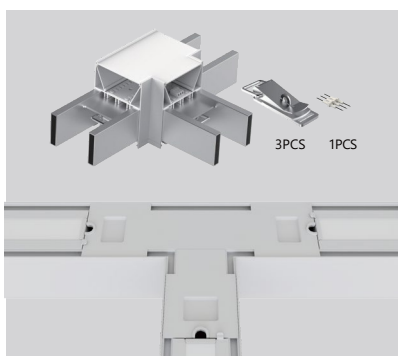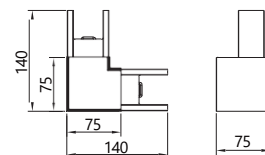



T-type

size : L90*W75*H75mm
 Output Voltage : 36V power : 12S2P,
 Max : 0.075A, Max : 2.7W
 12S2P*2, Max : 0.075A, Max : 2.7W LED :
 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 0.53/0.37KG

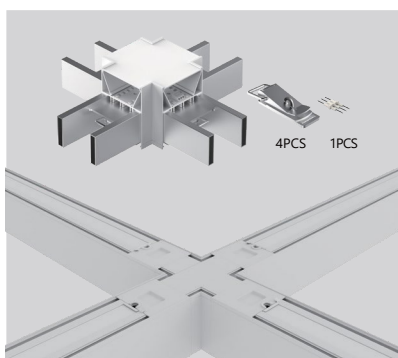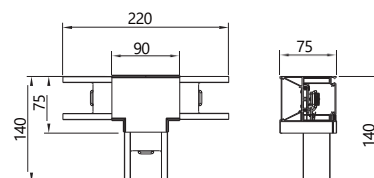


X-type

size : L90*W90*H75mm
 Output Voltage : 36V power : 12S2P,
 Max : 0.075A, Max : 2.7W
 12S2P*2, Max : 0.075A, Max : 2.7W LED :
 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 0.63/0.45KG

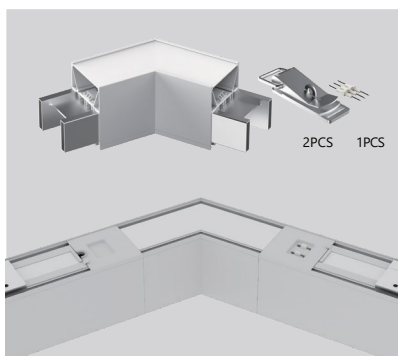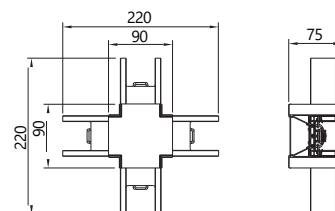


V-type

size : L100*W100*H75mm
 Output Voltage : 36V power : 12S2P,
 Max : 0.075A, Max : 2.7W
 12S2P*2, Max : 0.075A, Max : 2.7W LED :
 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 0.49/0.36KG

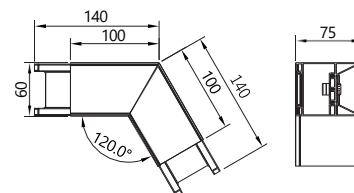



Class I (1)

Accessories

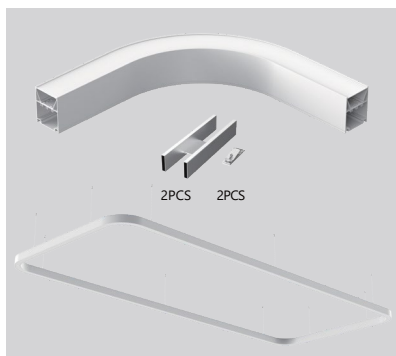



Circular corner

size : L428*W428*H75mm
 Input Voltage : 220-240V
 Output Voltage : 36V
 power : 23W CCT : 14-18-23W
 LED : 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 2.35/1.5KG

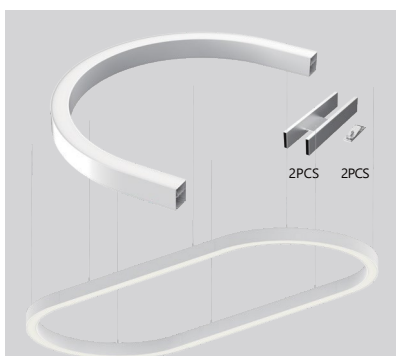


Semicircle

size : L1000*W678*H75mm
 Input Voltage : 220-240V
 Output Voltage : 36V
 power : 60W CCT : 36-48-60W
 LED : 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011
 Gross/Net weight : 5.5/4.25KG

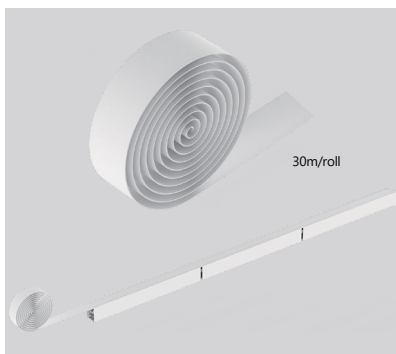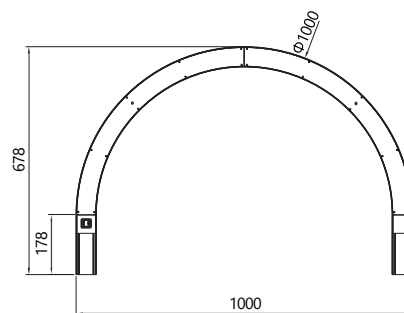

Diffuser

Size : L3000*W57*H0.8mm
 Material : PC Transmittance
 : >65% Haze : >85%

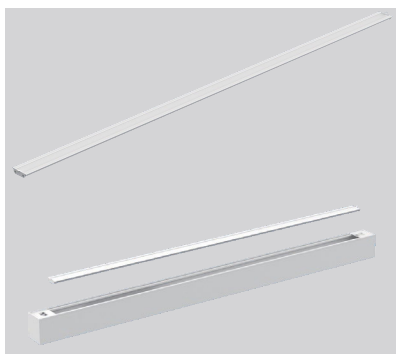

Upper luminescent module

Size : 600:L485*W42*H11mm 1200:L1085*W42*H11mm,
 1500:L1385*W42*H11mm 1800:L1685*W42*H11mm
 Material : PC, Aluminum Beam
 Angle : 120°
 LED : 2835 0.5W 150mA 3V
 Color Finish : RAL9016/RAL9011



42

L


-1-11



Suspended



Wall Mounted



Surface Mounted



Class I (1)